

DXG DUV Air Cooled Series

DXG Nanosecond Lasers

TEM₀₀, Deep Ultra-Violet, Q-Switched Lasers

With over 26 years of laser innovation and a legacy of reliability proven by tens of thousands of units delivered since 1998, our DXG Nd:YAG DUV Air-Cooled Series builds on the trusted DX platform, now extended into the deep ultraviolet. This new generation of diode-pumped, air-cooled nanosecond lasers delivers up to 1 W of DUV power, all in a compact and efficient air-cooled package, no water cooling required.

Designed for seamless integration into precision-driven industrial systems, the DXG DUV Series offers a unique combination of compact size, high reliability, and deep-UV capability, making it ideal for demanding applications such as high-resolution marking, micro-structuring, semiconductor processing, and medical device manufacturing. By bringing deep-UV performance to an air-cooled format, the DXG DUV Series redefines what's possible in compact laser design, delivering industry-leading precision and versatility in a field-ready system.



APPLICATIONS

- Marking on glass, plastic, ceramics
- Micro-drilling polymers and thin films
- Processing medical devices and catheters
- Wafer dicing and edge trimming
- Scribing displays and solar panels
- Micron-scale surface cleaning and ablation
- Coating removal on sensitive substrates
- Fine-feature engraving for security marking


FEATURES

- Up to ~67μJ Pulse Energy at 15 kHz
- True TEM₀₀ Output
- Short Pulse Widths
- Air-cooled with Base Plate Cooled Option
- Robust & Compact Form Factor
- Dynamic **P**ulse **E**nergy **C**ontrol - **PEC**
- **P**osition **S**ynchronized **O**utput - **PSO**
- Power Monitoring and Self-Calibration

Specifications – DXG DUV Air-Cooled Series			
	DXG-266-0.25	DXG-266-0.5	DXG-266-1
Wavelength	266nm		
Average Power @ 15kHz	250mW	500mW	1W
Pulse Energy @ 15kHz	~16μJ	~33μJ	~67μJ
Pulse Width @ 15kHz	~10-15ns		
Pulse repetition rate ¹	5kHz to 50kHz		
Pulse-to-pulse stability ²	<3% rms		
Long-term power stability ³	<2% rms		
Beam spatial mode & M ²	TEM ₀₀ - M ² <1.2		
Beam divergence (nominal)	~ 2.5 mrad		
Beam diameter at exit (nominal)	~ 0.9mm		
Beam roundness	>80%		
Beam pointing stability	<25 urad		
Polarization ratio	Horizontal; >100:1		
	Operational Specifications and Characteristics		
Interface	RS232, Ethernet, Software GUI, External TTL Triggering		
Warm-up time	< 5 minutes from standby, <10 minutes from cold start		
Electrical requirement	100-240 V AC - 15 V DC, 13.4 A [PSU Included]		
Line frequency	50-60 Hz		
Power consumption	~130W		
Dimensions	16 x 5 x 5in - [406.4 x 127 x 127 mm]		
Weight	~20 lbs [~9.1 kg]		
	Environmental Requirements		
Ambient temperature ⁴	Ambient 15°C to 30°C (59°F to 86°F) Operating Range		
	Relative humidity 0% to 80% max, non-condensing		
Storage conditions	-10°C to 40°C; sea level to 12000 m		
	0% to 80% relative Humidity, non-condensing		
Cooling system	Air-Cooled / Base Plate Cooled ⁵		


[1.] Lower pulse repetition rates (down to <5 kHz) performance achieved by pulse energy capping. [2.] Measured at ambient temperature ± 2°C. [3.] Measured over 8 hours ± 1°C. [4.] For operation of the laser outside of the specified temperature range, contact us. [5.] For water-cooled heatsink option, contact us.

Typical Beam Profile

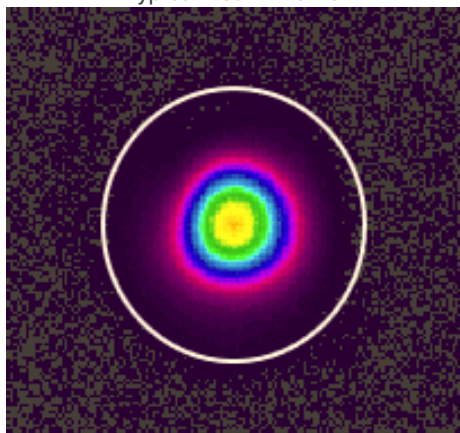


DXG-266-0.25

Power Vs. PRF

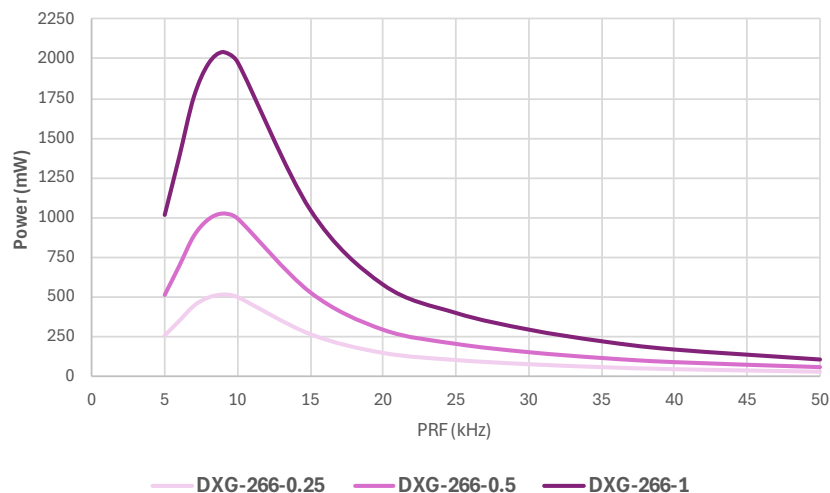

Dimensional Drawings

DXG-266 [Air-Cooled]

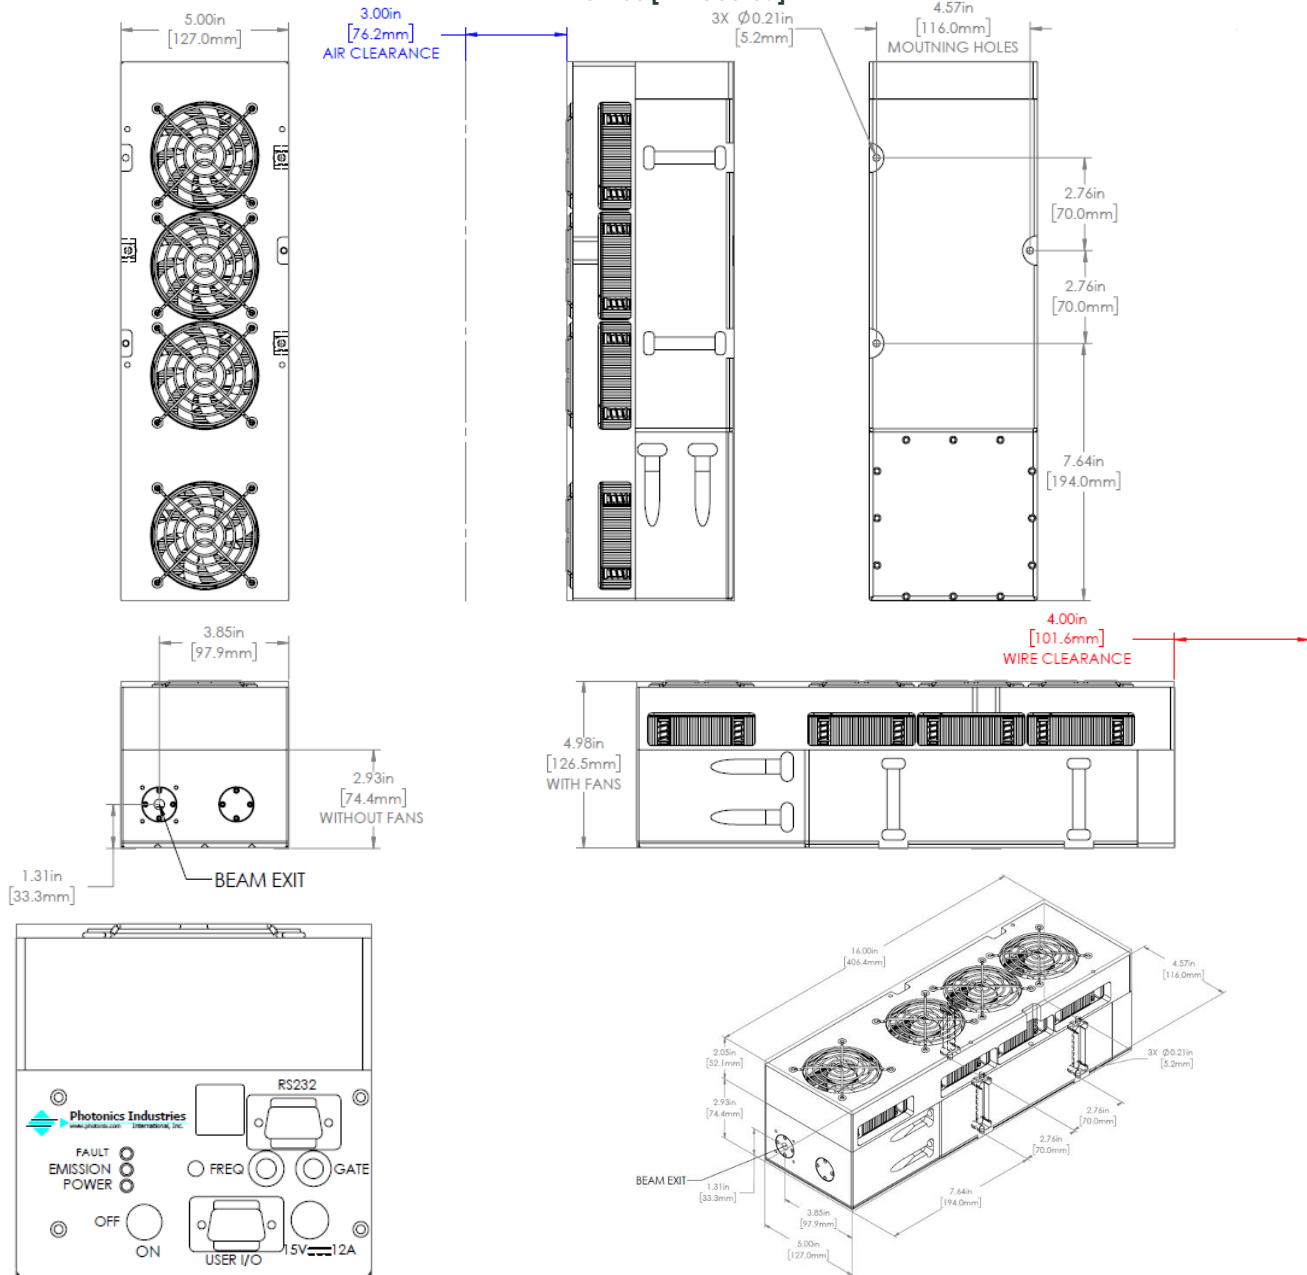

Options:

Rad-cooling™	Rad-cooling™ system instead of air-cooling fans				[RC]
Format	DX-266	-	[Power level]	-	[xxx]



Our ongoing policy is to improve the design and specification of our products. The information provided is non-binding.

© 2025 Photonics Industries International, Inc.

Headquarters: 1800 Ocean Ave, Ronkonkoma, New York 11779, United States

Photonics Industries International Inc. is the pioneer of intracavity harmonic lasers and is at the forefront of developing, manufacturing, and marketing a wide range of nanosecond, sub-nanosecond, picosecond, and femtosecond lasers for the industrial, scientific, defense and medical industries.

For more information www.photonix.com

