

SN Series

SN Sub-Nanosecond Lasers

DPSS, TEM₀₀, Pulse Picked Lasers

Photronics Industries' SN Series sub-nanosecond lasers redefine precision and power in a compact, all-in-one design. With industry-leading high pulse energies and adjustable pulse widths from 5 nanoseconds to an ultra-fast 500 picoseconds, these lasers deliver unparalleled performance for your most demanding applications.

Unlock the potential of the SN Series in diverse applications, from advanced micro processing to cutting-edge scientific innovations like airborne laser ranging (LIDAR). Achieve faster, more accurate results with high-energy pulses tailored to your needs. Elevate your processes with the SN Series—where performance meets possibility.



APPLICATIONS

- Laser Scribing and Texturing
- Laser-Induced Fluorescence and Imaging (LIF)
- PCB & Polymer Cutting & Drilling
- Glass Cutting and Shaping
- Time-Resolved Spectroscopy and Diagnostics
- High-Precision Marking
- Resistor Trimming
- Medical Micro structuring


FEATURES

- Up to ~1.5mJ Pulse Energy at 100kHz
- True TEM₀₀ Output
- Short Pulse Widths
- Air-cooled with Radiator Cooled Option
- Robust & Compact Form Factor
- Dynamic **Pulse Energy Control - PEC**
- Power Monitoring and Self-Calibration

| Specifications – SN Series | | | | |
|--|---|--------------------|--------------------|-------------------|
| | SN-532-5 | SN-532-25* | SN-532-70* | SN-532-100* |
| Wavelength | 532nm | | | |
| Max Average Power ¹ | 5W | 25W | 70W | 100W |
| Max Pulse Energy @ 100kHz | ~150uJ | ~250μJ | ~700μJ | ~1mJ |
| Pulse Width ³ | 500ps to 5ns | | | |
| Pulse repetition rate ⁴ | Single shot to 2MHz | | | |
| Pulse-to-pulse stability ⁵ | <2% rms | | | |
| Long-term power stability ² | ≤1% rms | | | |
| Beam spatial mode & M² | TEM ₀₀ - M² <1.2 | | | |
| Beam divergence (nominal) | <2 mrad | | | |
| Beam bore sight accuracy | ≤ 1 mm lateral (to specified exit location), ≤ 5 mrad angular (to specified exit direction) | | | |
| Beam roundness | >90% | | | |
| Beam pointing stability | <20 μrad | | | |
| Polarization ratio | Horizontal; >100:1 | | | |
| | Operational Specifications and Characteristics | | | |
| Interface | RS232, Ethernet, Software GUI, External TTL Triggering | | | |
| Warm-up time | < 5 minutes from standby, <10 minutes from cold start | | | |
| Electrical requirement | 15V DC, 13A | 32V DC, 15A | 32V DC, 28A | 60/32V DC, 20/18A |
| Line frequency | 50-60 Hz | | | |
| Power consumption ⁶ | ~200W | ~500W | ~900W | ~1300W |
| Dimensions ⁷ | 18 x 5 x 8.90in | 16 x 8.5 x 4.5 in. | 20 x 8.5 x 4.5 in. | 20 x 10 x 4.5 in. |
| Weight | 35lbs [~15.8kg] | ~38lbs | ~47lbs | ~57lbs |
| | Environmental Requirements | | | |
| Ambient temperature ² | Ambient 15°C to 30°C (59°F to 86°F) Operating Range | | | |
| | Relative humidity 0% to 80% max, non-condensing | | | |
| Storage conditions | -10°C to 40°C; sea level to 12000 m | | | |
| | 0% to 80% relative Humidity, non-condensing | | | |
| Cooling system | Air-Cooled | Water-Cooled | | |


[1.] Standard power optimization is at 1 MHz. Output power is specifiable at different pulse repetition rates. Pulse energy varies depending on the repetition rate optimization and specified pulse width. > 3 mJ single pulse energy optimization is available. [2.] Measured over 8 hours ± 1°C. [3.] Specifiable pulse width. Pulse energy varies depending on the specified pulse width. [4.] Lower pulse repetition rate operation, down to single shot, achieved by utilizing PSO or POD features. Higher pulse repetition rates are available [5.] Measured at ambient temperature ± 2°C. [6.] Power consumption data does not include an external chiller's power consumption. [7.] SN Series sub-nanosecond lasers are all-in-one (AIO) and do not require a separate controller or utility module. All connections for operation and control of the laser can be found on the back panel of the AIO laser. [8.] 60V/20A and 32V/28A two connections between laser head and PSU. *Illustration includes some simulated data for conceptual visualization.

Typical Beam Profile

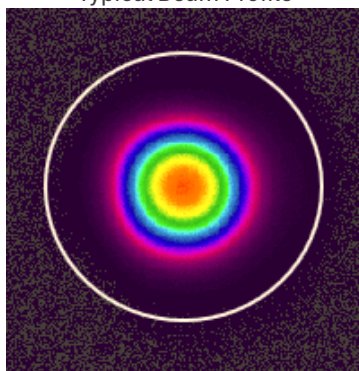

SN-532-5


Power Vs. PRF

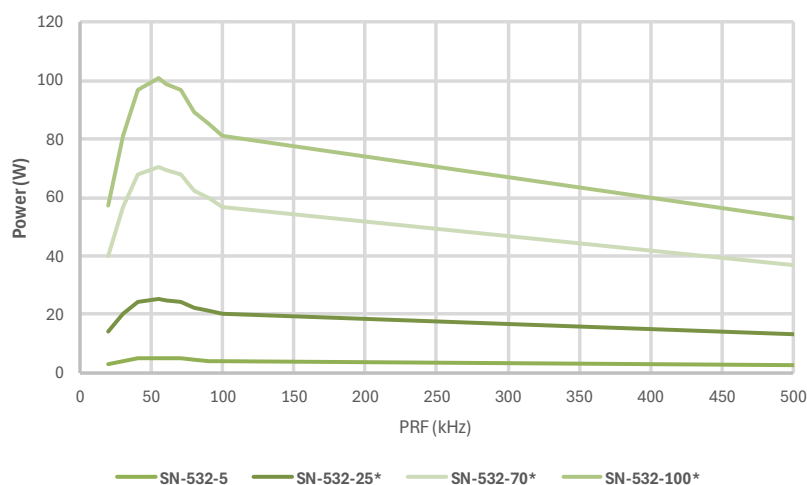

| Specifications – SN Series | | | | |
|--|---|--------------------|--------------------|-------------------|
| | SN-355-3 | SN-355-10* | SN-355-28* | SN-355-50* |
| Wavelength | 355nm | | | |
| Max Average Power ¹ | 3W | 10W | 28W | 50W |
| Max Pulse Energy @ 100kHz | ~30μJ | ~100μJ | ~280μJ | ~500μJ |
| Pulse Width ³ | 500ps to 5ns | | | |
| Pulse repetition rate ⁴ | Single shot to 2MHz | | | |
| Pulse-to-pulse stability ⁵ | <2% rms | | | |
| Long-term power stability ² | ≤1% rms | | | |
| Beam spatial mode & M ² | TEM ₀₀ - M ² <1.2 | | | |
| Beam divergence (nominal) | ~ 2 mrad | | | |
| Beam bore sight accuracy | ≤ 1 mm lateral (to specified exit location), ≤ 5 mrad angular (to specified exit direction) | | | |
| Beam roundness | >90% | | | |
| Beam pointing stability | <25 μrad | | | |
| Polarization ratio | Vertical; >100:1 | | Horizontal; >100:1 | |
| | Operational Specifications and Characteristics | | | |
| Interface | RS232, Ethernet, Software GUI, External TTL Triggering | | | |
| Warm-up time | < 5 minutes from standby, <10 minutes from cold start | | | |
| Electrical requirement | 15V DC, 13A | 32V DC, 15A | 32V DC, 28A | 60/32V DC, 20/18A |
| Line frequency | 50-60 Hz | | | |
| Power consumption ⁶ | ~200W | ~500W | ~900W | ~1300W |
| Dimensions ⁷ | 18 x 5 x 8.90in | 16 x 8.5 x 4.5 in. | 25.5 x 10 x 4.5in | |
| Weight | 35lbs [~15.8kg] | ~38lbs | ~71lbs | |
| | Environmental Requirements | | | |
| Ambient temperature ² | Ambient 15°C to 30°C (59°F to 86°F) Operating Range | | | |
| | Relative humidity 0% to 80% max, non-condensing | | | |
| Storage conditions | -10°C to 40°C; sea level to 12000 m | | | |
| | 0% to 80% relative Humidity, non-condensing | | | |
| Cooling system | Air-Cooled | Water-Cooled | | |


[1.] Standard power optimization is at 1 MHz. Output power is specifiable at different pulse repetition rates. Pulse energy varies depending on the repetition rate optimization and specified pulse width. > 3 mJ single pulse energy optimization is available. [2.] Measured over 8 hours ± 1°C. [3.] Specifiable pulse width. Pulse energy varies depending on the specified pulse width. [4.] Lower pulse repetition rate operation, down to single shot, achieved by utilizing PSO or POD features. Higher pulse repetition rates are available [5.] Measured at ambient temperature ± 2°C. [6.] Power consumption data does not include an external chiller's power consumption. [7.] SN Series sub-nanosecond lasers are all-in-one (AIO) and do not require a separate controller or utility module. All connections for operation and control of the laser can be found on the back panel of the AIO laser. [8.] 60V/20A and 32V/28A two connections between laser head and PSU. *Illustration includes some simulated data for conceptual visualization.

Power Vs. PRF

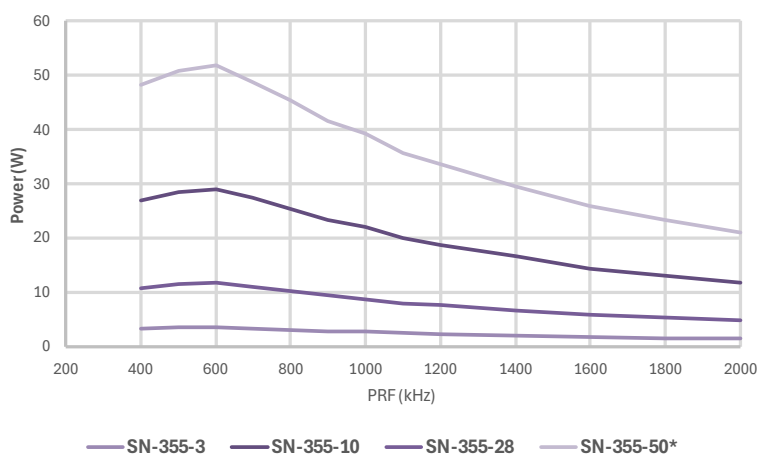

Dimensional Drawings

SN-532-5, SN-355-3

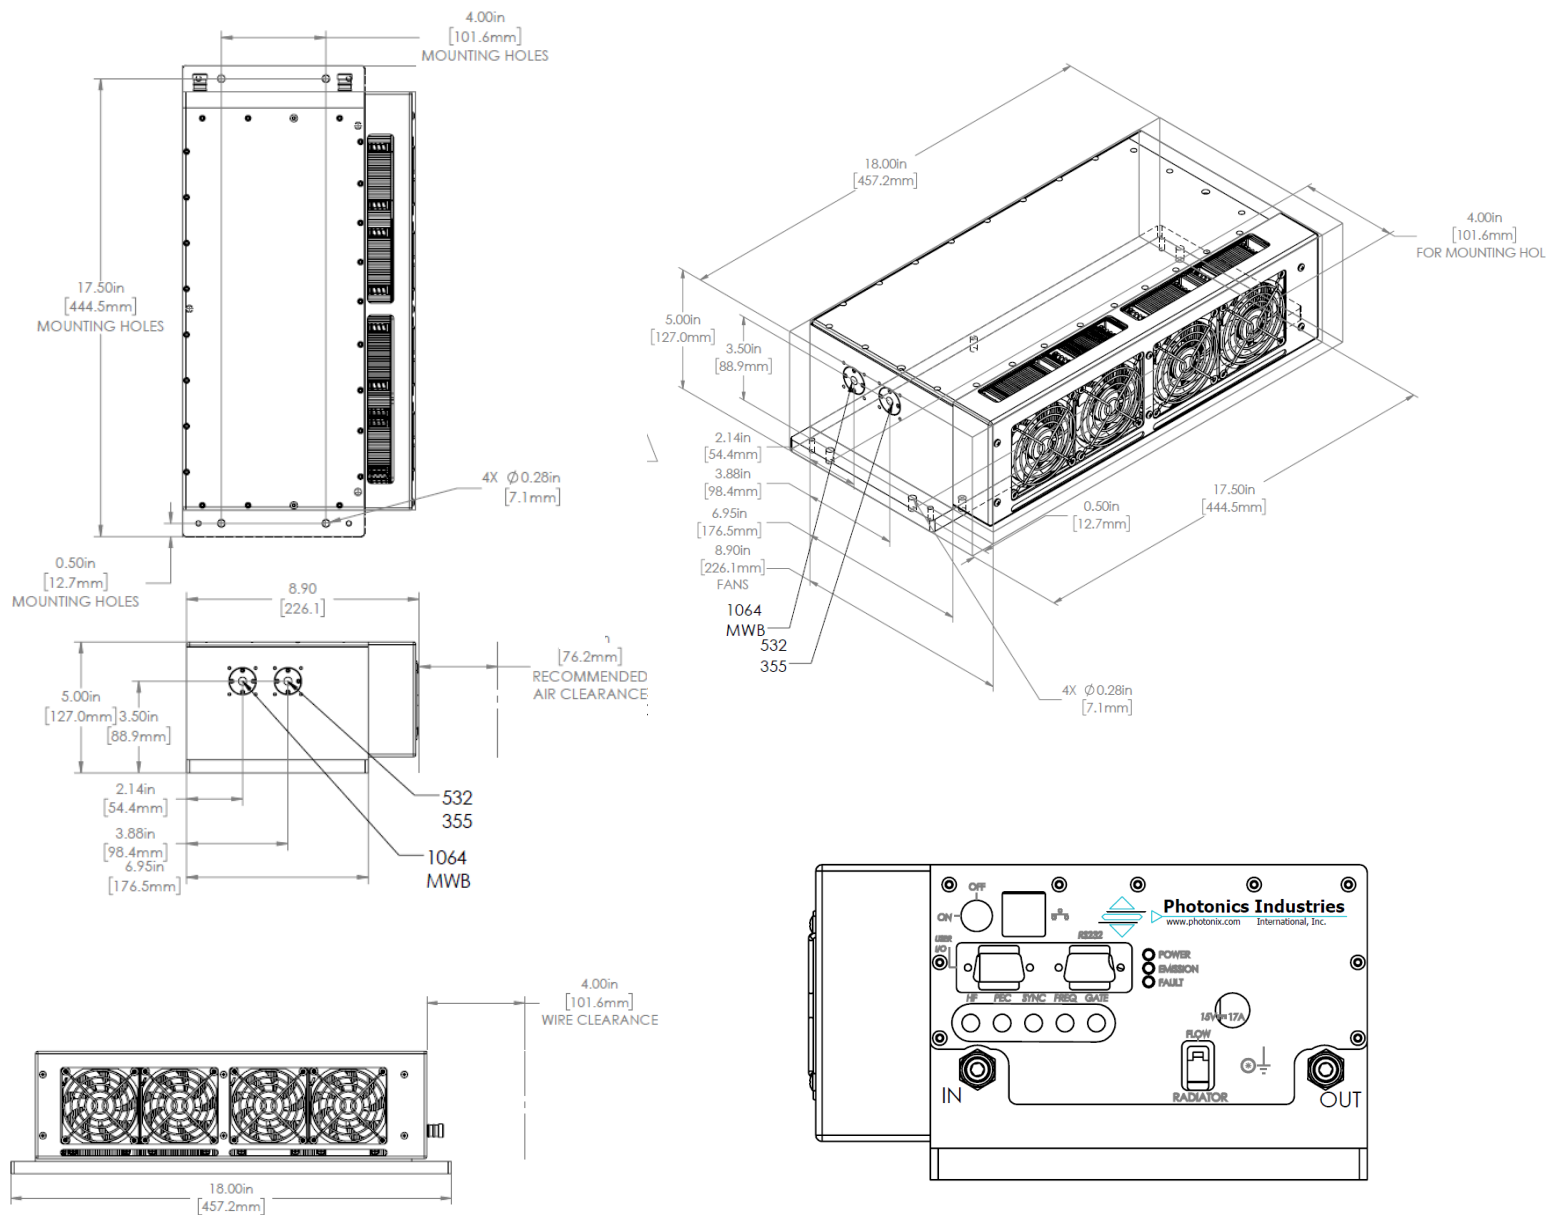



Options:

| | | | | | |
|------------------------|---|---|---------------|---|--------------|
| Multi-wavelength | Multi-wavelength output, blended or selectable | | | | [MWB], [MWS] |
| Deep Ultraviolet (DUV) | 266nm Wavelength available upon request | | | | [SN-266] |
| Rad-cooling™ | Rad-cooling™ system instead of air-cooling fans | | | | [RC] |
| | | | | | |
| Format | SN-1064/532/355 | - | [Power level] | - | [xxx] |

Dimensional Drawings

SN-532-25, SN-355-10

*The SN1 model depicted is a future release and is expected to be available in Q3 2025. Specifications and availability are subject to change. For information on currently available models, please contact us

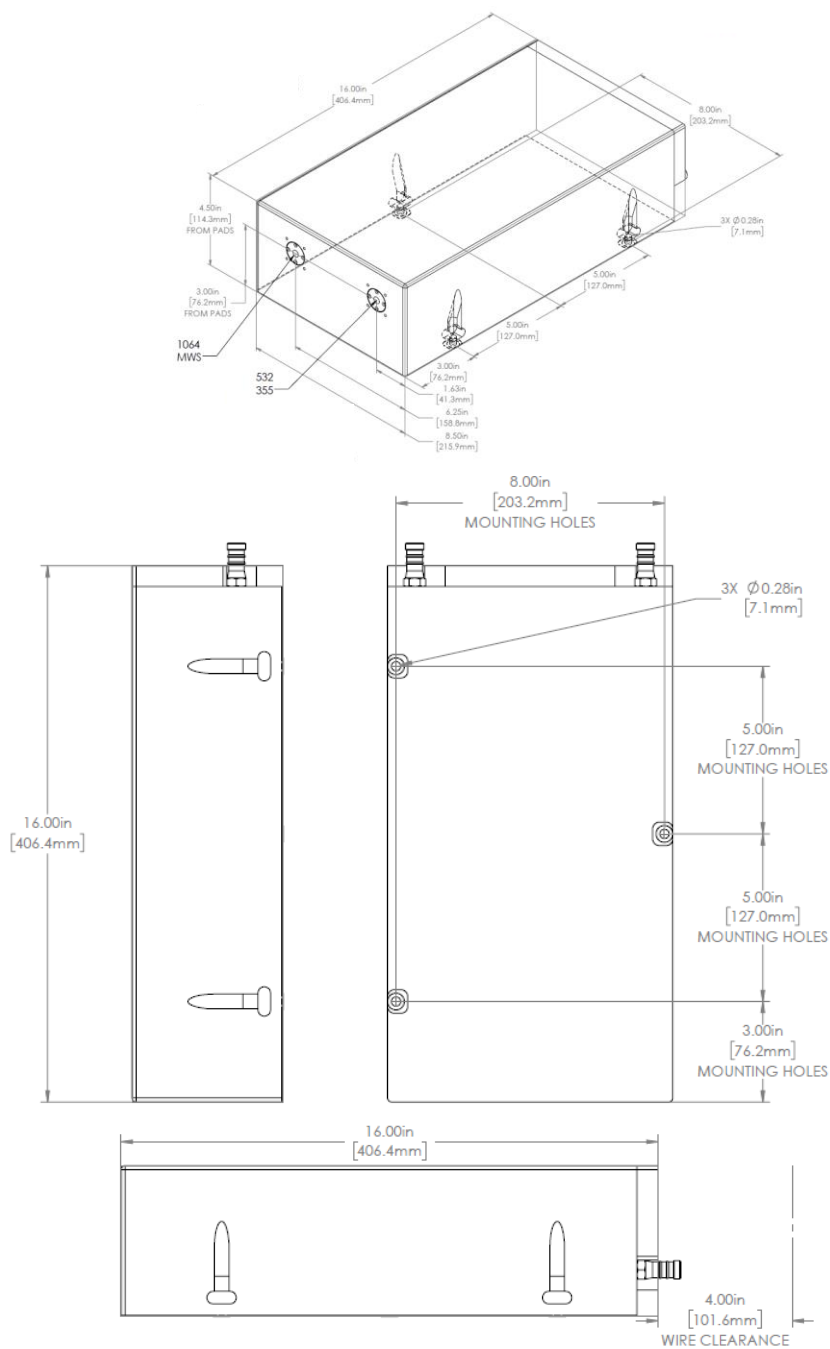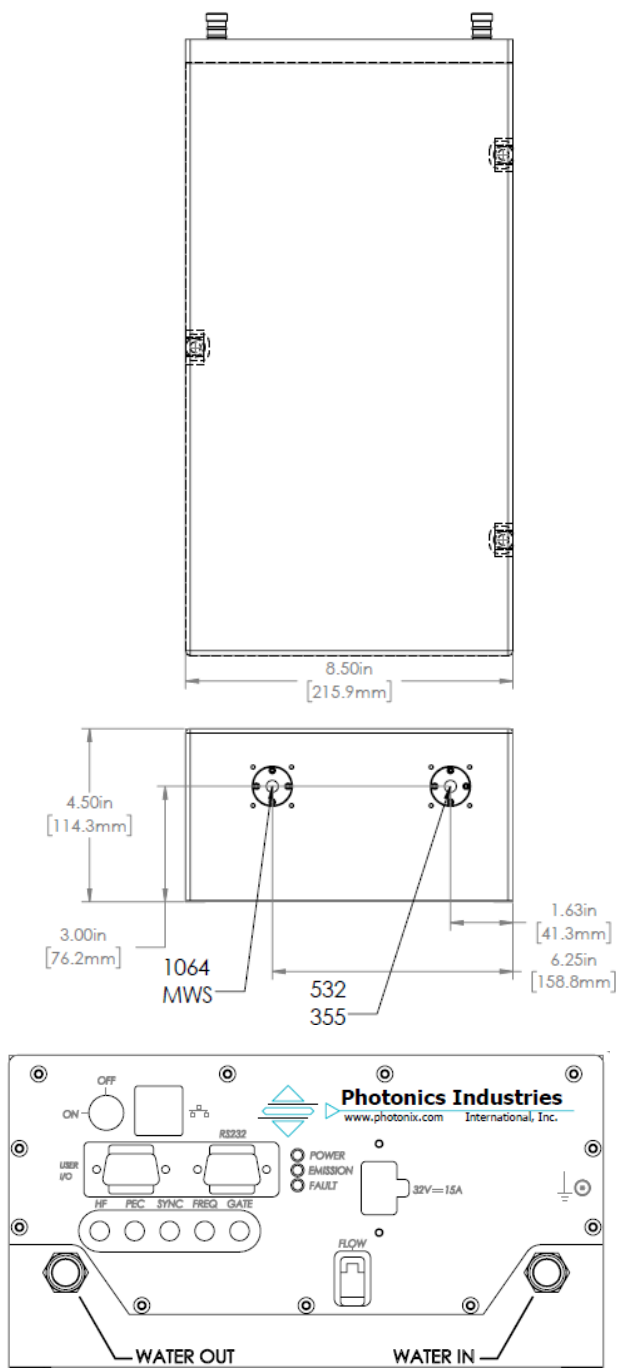



Options:

| | | |
|------------------------|--|--------------|
| Multi-wavelength | Multi-wavelength output, blended or selectable | [MWB], [MWS] |
| Deep Ultraviolet (DUV) | 266nm Wavelength available upon request | |

| | | | | | |
|--------|---------------------|---|---------------|---|-------|
| Format | SN-1064/532/355/266 | - | [Power Level] | - | [xxx] |
|--------|---------------------|---|---------------|---|-------|

Dimensional Drawings




SN-532-70

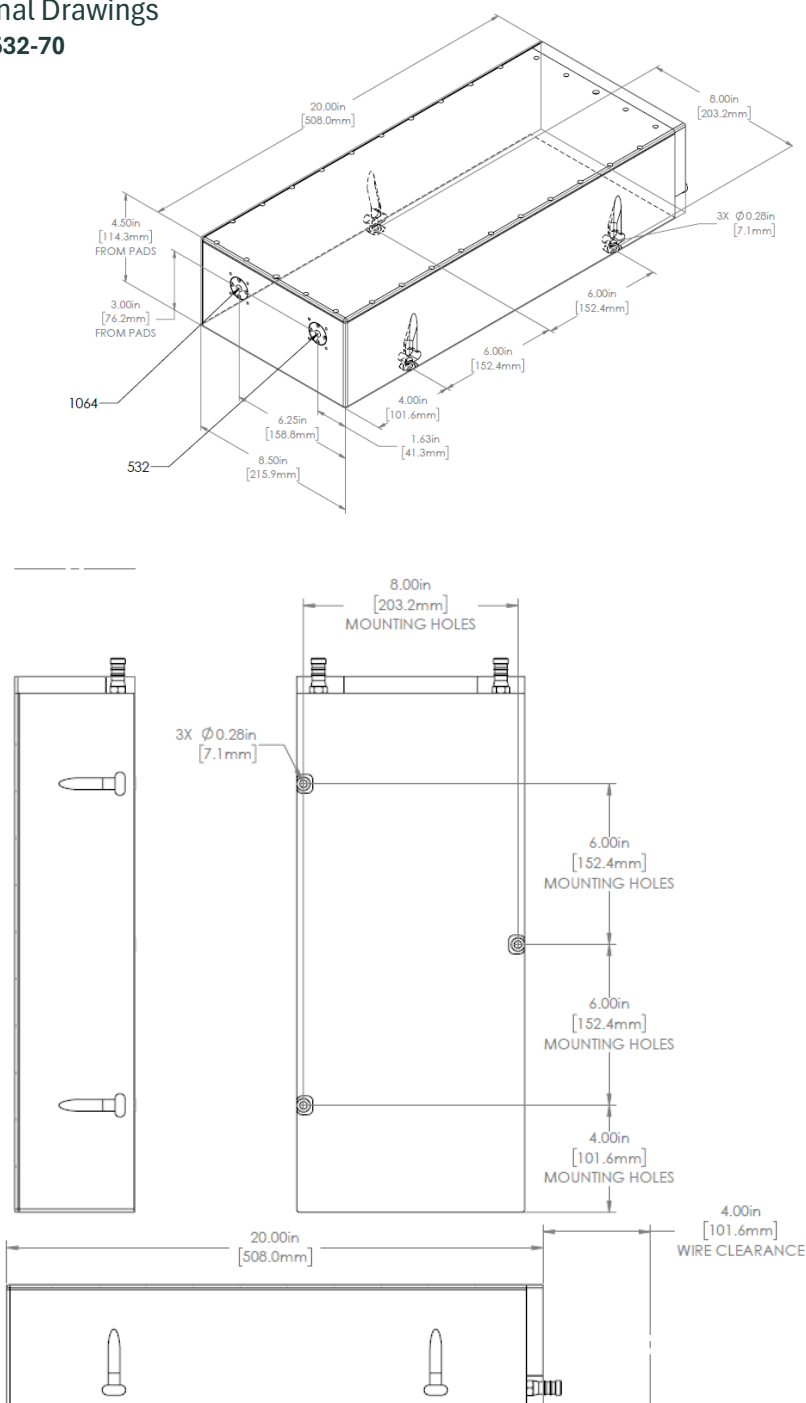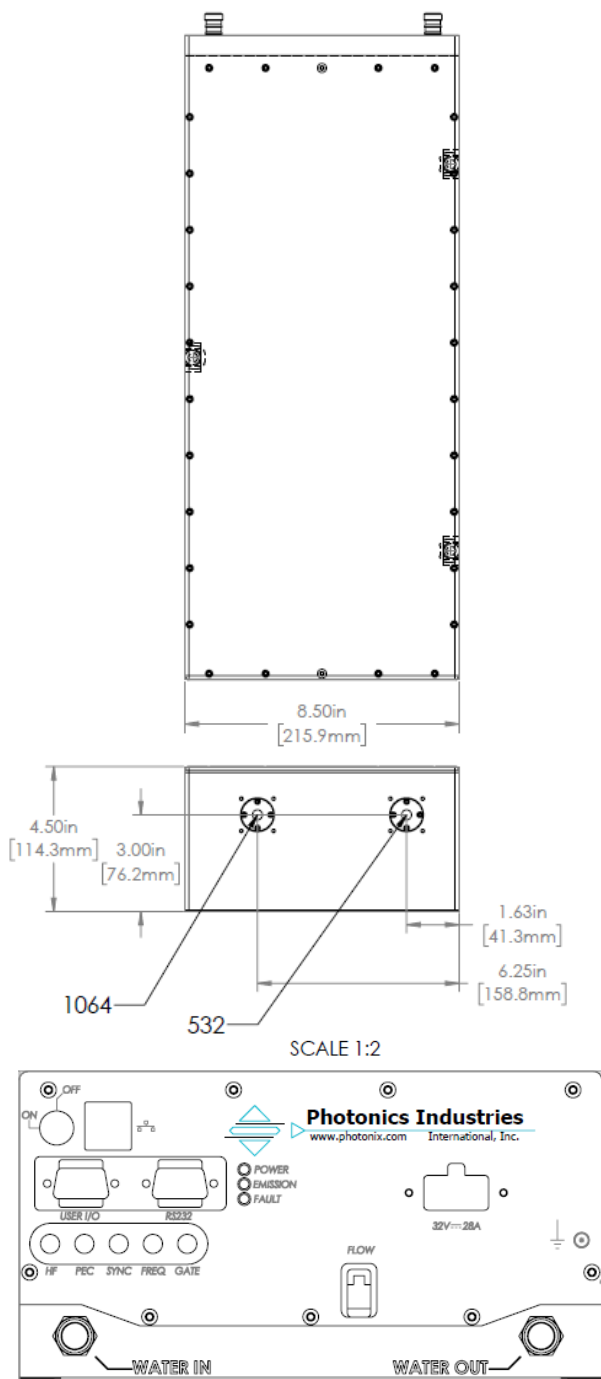

Options:

| | | | | | |
|------------------|-------------------------|---|---------------|---|-------|
| Multi-wavelength | Multi-wavelength output | | | | [MWB] |
| | | | | | |
| Format | SN-1064/532 | - | [Power Level] | - | [xxx] |


Dimensional Drawings

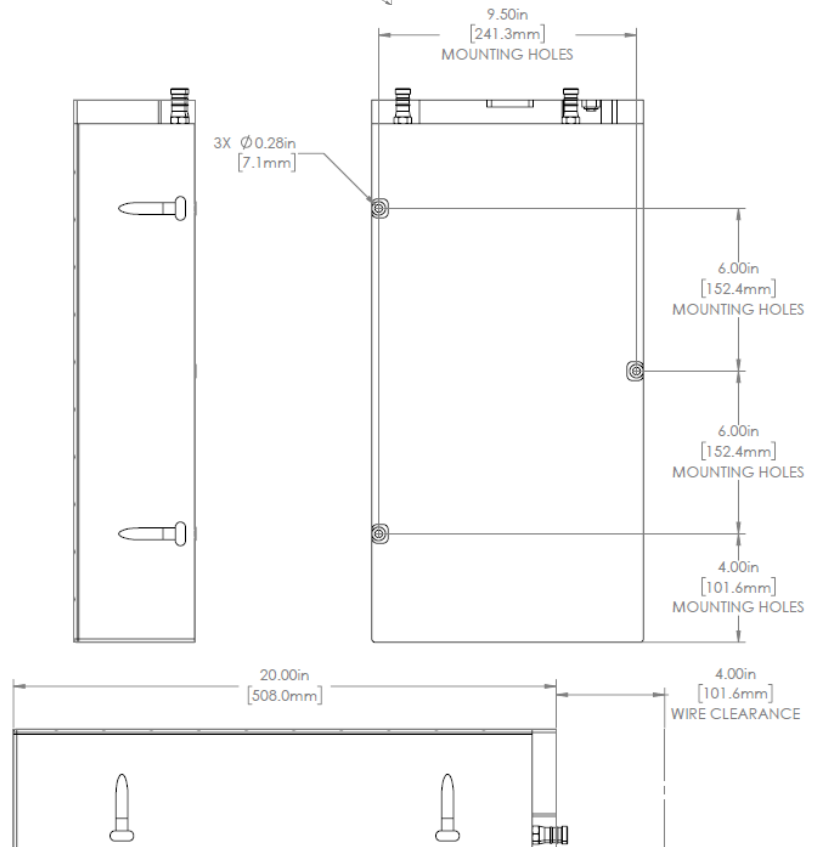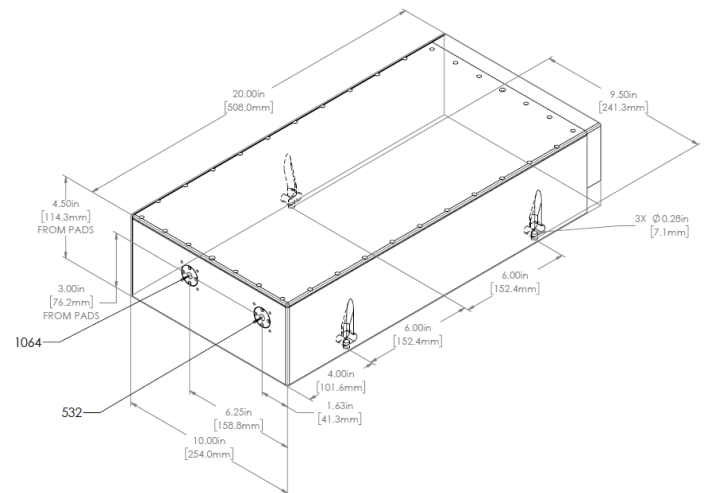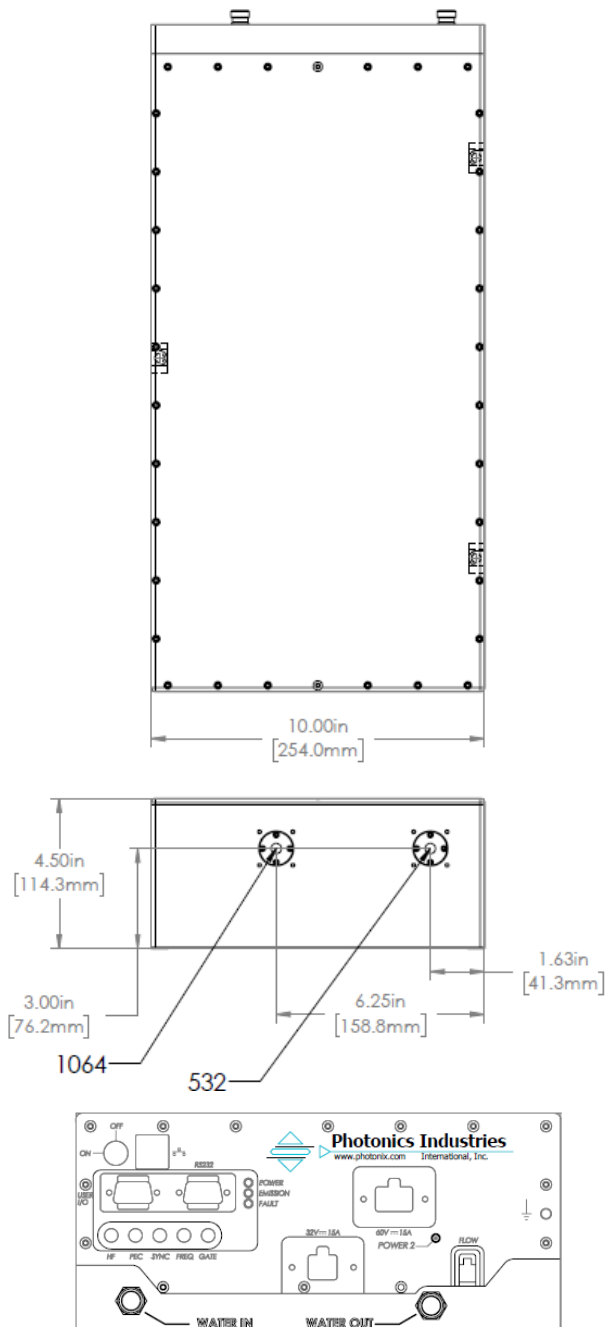SN-532-100

Options:

| | | |
|------------------|----------------------------------|-------|
| Multi-wavelength | Multi-wavelength output, blended | [MWB] |
|------------------|----------------------------------|-------|

| | | | | | |
|--------|-------------|---|---------------|---|-------|
| Format | SN-1064/532 | - | [Power Level] | - | [xxx] |
|--------|-------------|---|---------------|---|-------|

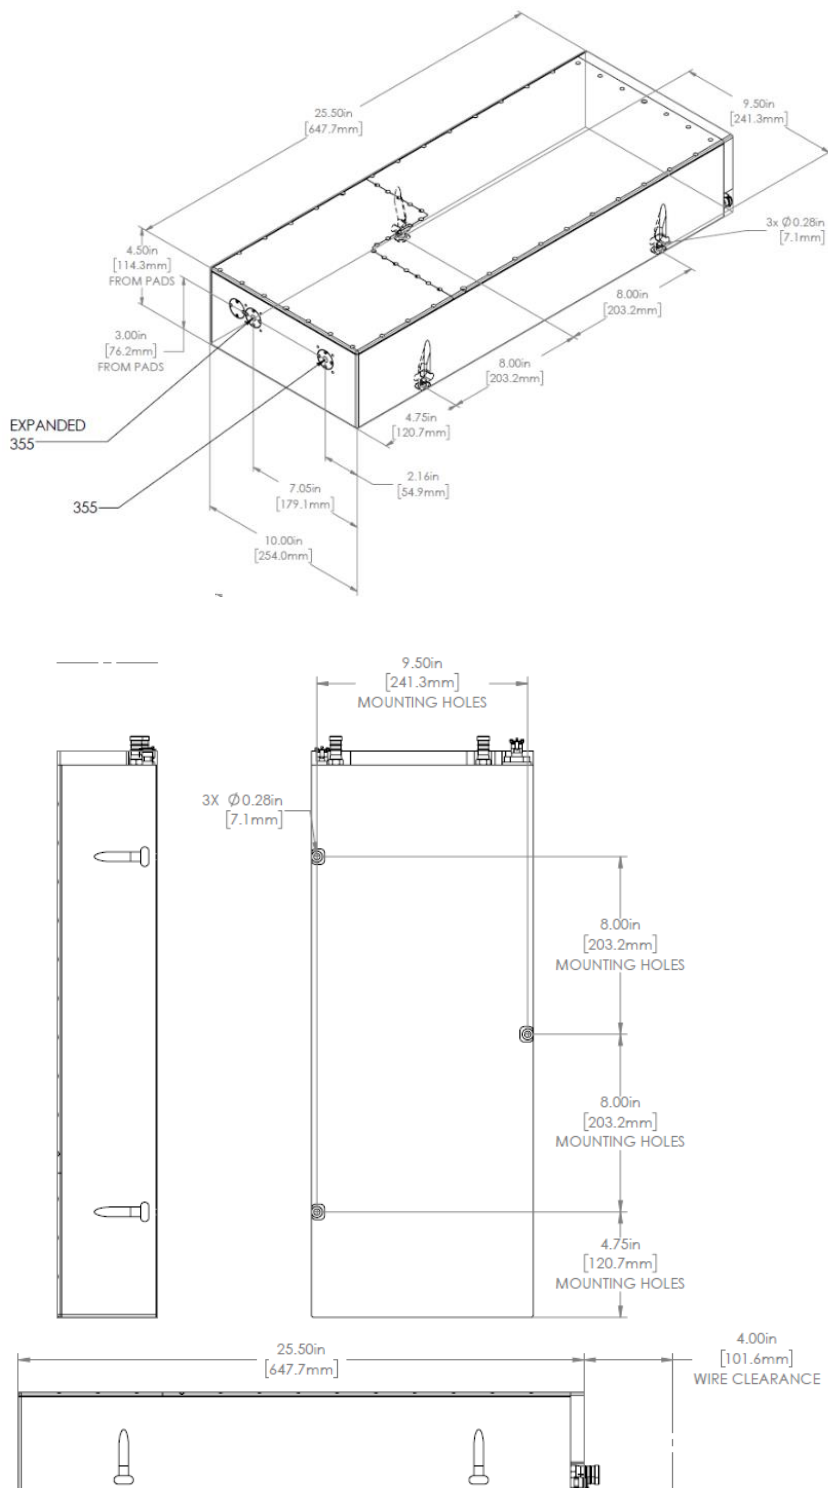SN-355-28

Dimensional Drawings

Isometric view of the EXPANDED 355 enclosure. Dimensions are provided in inches and millimeters:

- Top length: 25.50in [647.7mm]
- Top width: 9.50in [241.3mm]
- Front height: 4.50in [114.3mm] FROM PADS
- Side height: 3.00in [76.2mm] FROM PADS
- Bottom length: 8.00in [203.2mm]
- Bottom width: 8.00in [203.2mm]
- Bottom height: 4.75in [120.7mm]
- Bottom height: 2.16in [54.9mm]
- Bottom height: 7.05in [179.1mm]
- Bottom height: 10.00in [254.0mm]
- Bottom height: 3X Ø0.25in [7.1mm]

